
AFAB Standard Gutter


Standard Gutter, Multi-System Compliant

Approvals


ANSI/SPRI/GT-1 TESTED
(MAX PRESSURE LISTED IN NOTES)

Product must be installed using fasteners into each pre-punched hole to ensure testing compliance.

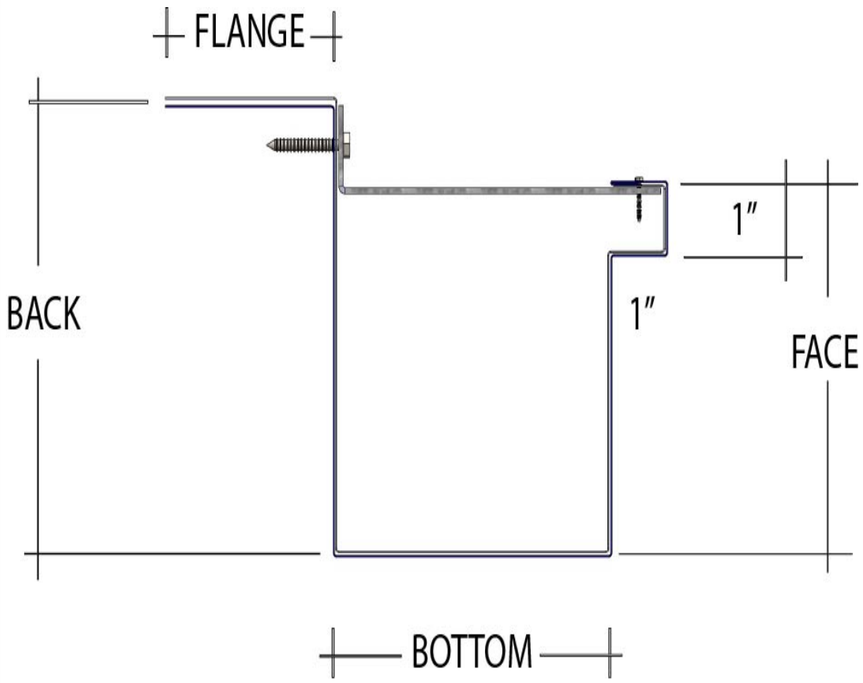


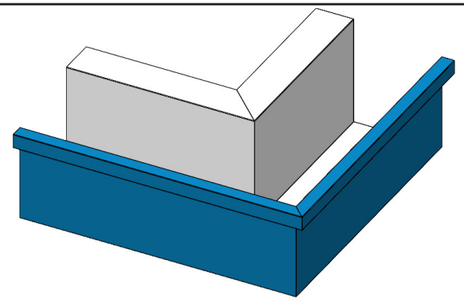


Outside Miter

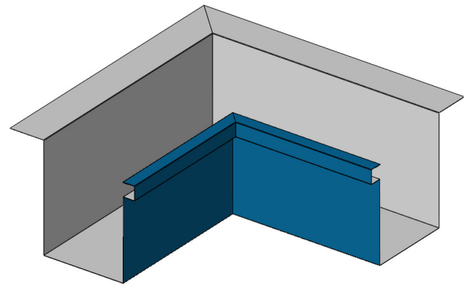

Inside Miter

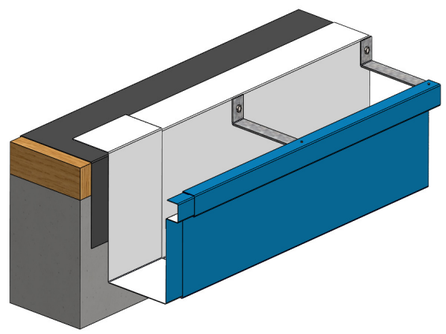

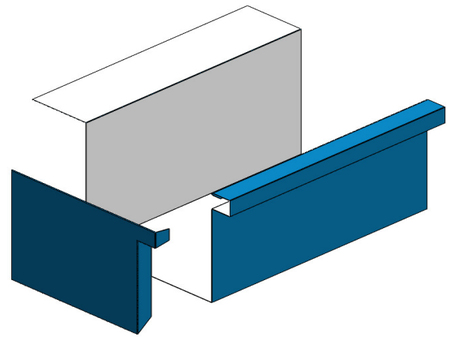

End CAP Insert
(Left Shown)

Product Notes

Gutter system composed of a Factory Fabricated Stays @ 30" On Center, Joint Splice, and a Cover in 10'-0" lengths.
Please attach additional information for special angles of miters or roof plan details along with any Pictures needed.
Product should be installed in accordance with Installation Instructions to ensure compliance to testing requirements.
ANSI/SPRI/GT-1 Test Pressures up to 290psf.

Back	Flange	Bottom	Face
Select a Siz	Select a Siz	Select a Siz	Select a Siz

Material: Select Material

Color: Select a Color

Quantities

	Lineal Footage
	Outside Miters
	Inside Miters
	Right End Cap Inserts
	Left End Cap Inserts

Welded — Accessory Type

Project Information

Project Name:

Project Contact name, Email, Phone:

Project Address:

Project Type: Select Type

Order Information

Customer Name:

Customer Address, Email & Phone:

Customer Purchase Order #:

Delivery Instructions / Date Needed:

Customer Approval:

Date Completed:

Submit To:
QUOTES@APPLIEDFABRICATORS.COM

Applied Fabricators
7185 200N
Greenfield, IN 46140
317-284-0685

Rev: 0
Drn by: KP
Date: 2-5-26
Sheet 1 of 1