

AFAB Wind-Breaker Gutter


High-Wind Gutter, Multi-System Compliant

Product must be installed using fasteners into each pre-punched hole to ensure testing compliance.

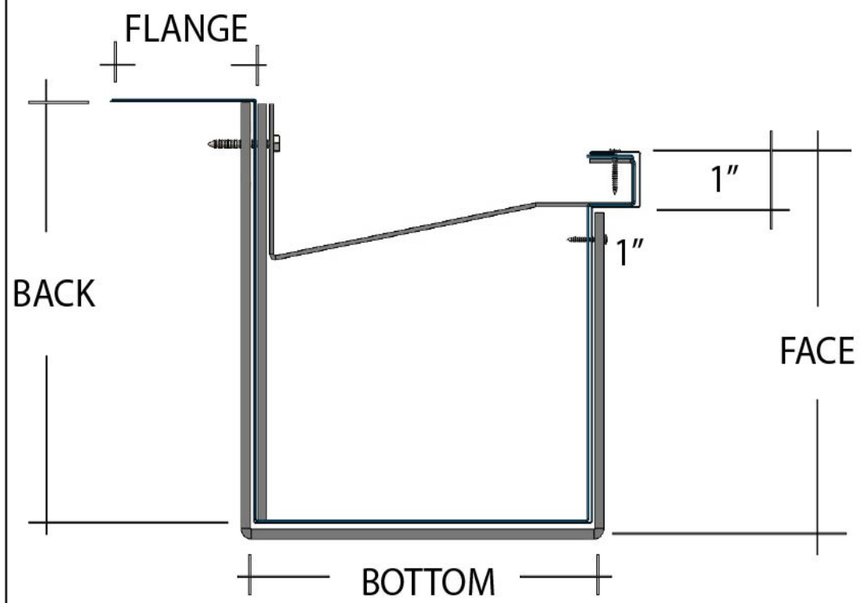


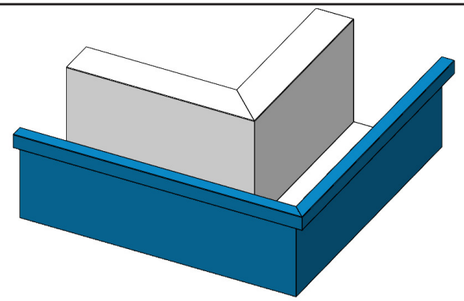


Outside Miter

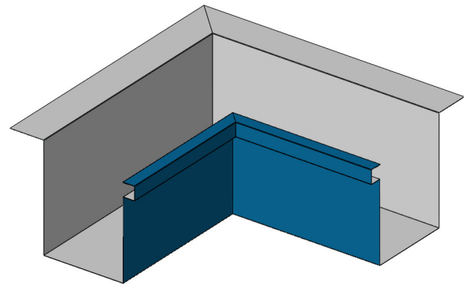

Inside Miter

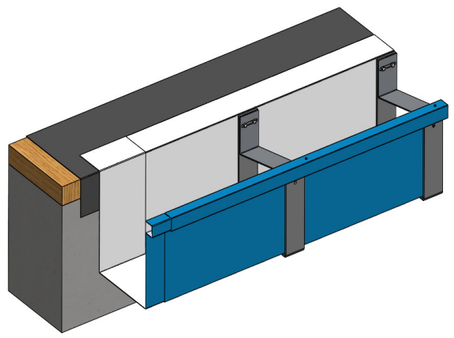

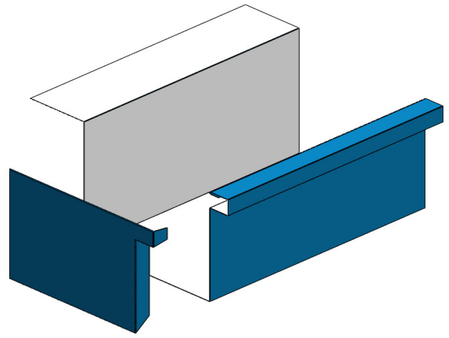

End CAP Insert
(Left Shown)

Product Notes

Gutter system composed of a Factory Fabricated Stays, Bars, and Brackets @ 30" On Center, Joint Splice, and a Cover in 10'-0" lengths.
Please attach additional information for special angles of miters or roof plan details along with any Pictures needed.
Product should be installed in accordance with Installation Instructions to ensure compliance to testing requirements.
ANSI/SPRI/GT-1 Test Pressures up to 280psf.

Back Select a Siz

Flange Select a Siz

Bottom Select a Siz

Face Select a Siz

Material Select Material

Color Select a Color

Quantities

- Lineal Footage
- Outside Miters
- Inside Miters
- Right End Cap Inserts
- Left End Cap Inserts

Welded

Accessory Type

Approvals

ANSI/SPRI/GT-1 TESTED
(MAX PRESSURE LISTED IN NOTES)

FM APPROVED

Project Information

Project Name:

Project Contact name, Email, Phone:

Project Address:

Project Type: Select Type

Order Information

Customer Name:

Customer Address, Email & Phone:

Customer Purchase Order #:

Delivery Instructions / Date Needed:

Customer Approval:

Date Completed:

Submit To:
QUOTES@APPLIEDFABRICATORS.COM

Applied Fabricators
7185 200N
Greenfield, IN 46140
317-284-0685

Rev: 0
Drn by: KP
Date: 2-5-26
Sheet 1 of 1